


NEW! BD6™ Material Enabling Optical Athermalization²

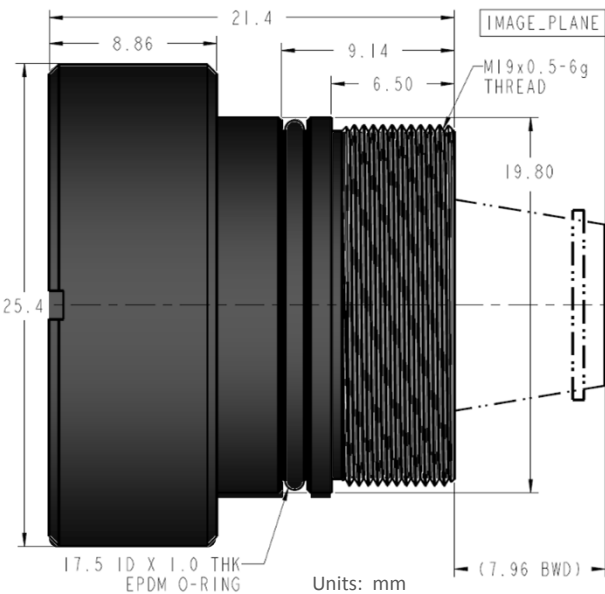

KEY FEATURES

Optical:

- 20mm EFL, f/1.2 Lens
- 18deg HFOV on 640X480/10µm detector¹
- Low-cost dual element design
- Utilizes aspheric and diffractive performance
- High efficiency AR coating for LWIR (8-14µm)
- **Optically Athermalized² using BD6™ material**

Mechanical:

- Small size and weight
- Precision molded chalcogenide lens material
- Black anodized aluminum housing
- Threaded interface for adjustable focus
- Internally sealed to IP67 standard³

Horizontal FOV for Various Detector Sizes

Resolution → Pixel Size ↓	160x120	320x240	384x288	640x480	1024x768
34µm	16°	31°	37°	N/A	N/A
25µm	11°	23°	27°	N/A	N/A
17µm	8°	16°	19°	31°	N/A
12µm	6°	11°	13°	22°	35°
10µm	5°	9°	11°	18° Optimal¹	29°

¹Lens optimized for this format. Data for other formats available upon request.

²See optical performance table on page 2 for athermal temperature range

³Outer threads must also be sealed at installation

Optical Performance for 640x480 / 10μm Detector ¹

Parameter	Notes	Design Value	Unit
MTF – Min Sag/Tan at Nyquist (50cyc/mm)	Diffraction Limited MTF (<i>Ref. Only</i>)	28	%
	On-axis	27	%
	VFOV	24	%
	HFOV	22	%
	Corner	19	%
EFL	Magnification-based	20	mm
F/#	Aperture-based	1.2	
Field of View	Vertical	14	Deg
	Horizontal	18	Deg
	Diagonal (corner)	23	Deg
Relative Illumination	At HFOV	95	%
	At Corner Field	88	%
Distortion	At HFOV	< 1	%
	At Corner Field	< 1	%
Fixed Focus Range <i>(Range if used without manual focus, allowing ~10% MTF drop at Nyq/2)</i>	Depth of Field (target range)	8 – Infinity	m
	Athermal Temperature Range ²	-40 to +85	°C
Operational Waveband	LWIR thermal waveband	8 – 14	μm
Transmission	HEAR coated witness samples (8-12μm)	>96	%

Mechanical Parameters

Parameter	Notes	Design Value	Unit
Height	Front to back of lens assembly	21.4	mm
Thread Interface	Lens assembly outer thread (ASME)	M19x0.5-6g	
Working Distance to Image Plane (FPA)	Assumes 0.7mm Si window, nominal focus at infinity	8.0	mm
Max Exposure Temp	Storage / post-processing	140	°C
Internal Seal	Threads must also be sealed at installation	IP67	

¹ Performance data for nominal design on specified detector over 8-12μm waveband. Data for other detector formats available upon request.

² Assumes aluminum mount used between lens and detector FPA. Additional passive athermalization available in specialized housing.